
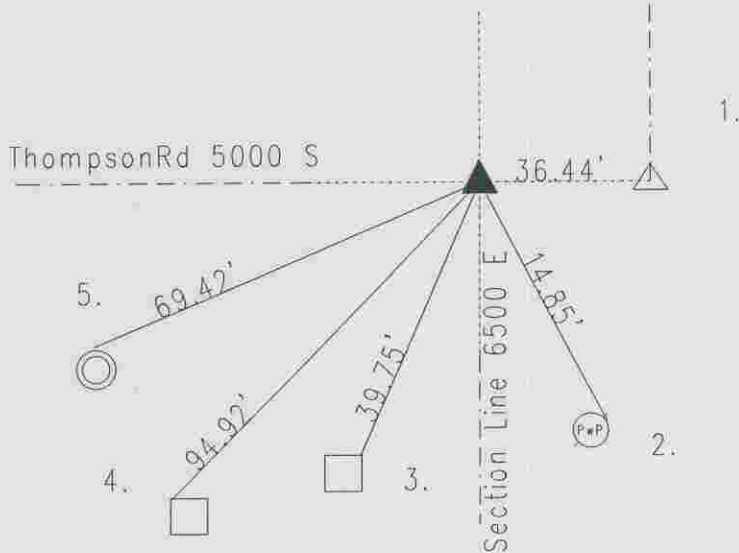


OFFICE OF THE MARION COUNTY SURVEYOR  
SECTION RECORD CORNER  
SECTION 2 TOWNSHIP 14 RANGE 4  
DATE: 4-4-05  
PARTY CHIEF: Wilcoxon  
CREW: \_\_\_\_\_  
TYPE OF MARKER: Harrison  
METHOD OF ESTABLISHMENT: County: 4-25-00

IN. S.P.C. E ZONE NAD '83  
NAME: 14040202  
N: 493737.7812(m)  
E: 66770.7425(m)

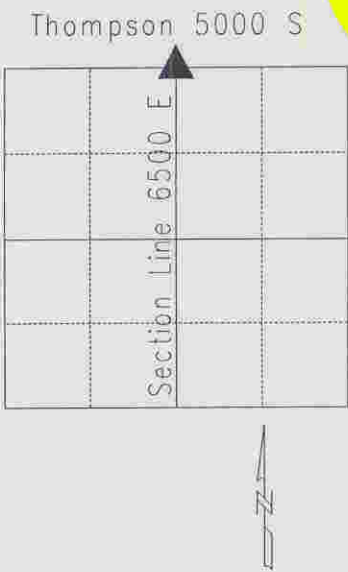

Original post set 1820 by Hendricks with witness: 10" lynn S 36 E 11 links, 10" elm S 35 W 15 links per Marion County Atlas pg. 10. Fatout 6-4-1883 called double corner with distance between being .53 chains per Franklin Township Legal Survey Book pg. 64. 7-1943 called stone distance between 38.1'. 8-19-70 called railroad spike with cut 'x' over stone and distance between as 36.31'. 6-24-75 called railroad spike with cut 'x' over stone and distance between 36.15'. Excavated 7-28-86 stone found 24" down. Harrison set. Re-tied 4-25-00 by Wilcoxon. Re-tied 4-4-05 by Wilcoxon.

14040202

REF.	DISTANCE	DESCRIPTION
1.	36.44'	Due F to Harrison found S. Q 35-15-4
2.	14.85'	PK nail E PwP#102-707 12"up
3.	39.75'	NF corner metal power box
4.	94.92'	NW corner of concrete power box
5.	69.42'	Cut 'x' N -rim of telephone manhole